

HYDRAULIC BOLT TENSIONING

1500 bar 30m Downline Hose


This 1500 bar working pressure hose is manufactured from multi spiral reinforced high pressure flexible hose, colour coded BLUE.

Each end of the hose is fitted with a 1/4" BSP female swivel connector. Any number of these 30 m long hoses may be joined together to reach the operating water depth. The first and last hose may be fitted with a quick connector for connection to the pump at the top side and at depth, to the sub sea harness.

The hoses are normally mounted on a hose reel and stand as shown below. The hoses are filled with oil and pressure tested prior to despatch.

Minimum burst pressure is 4500 bar and the minimum bend radius is 150 mm. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack.


Test certificates are supplied. All hoses are marked with serial numbers for identification. This hose assembly conforms to the European Pressure Equipment Directive and is CE Marked.

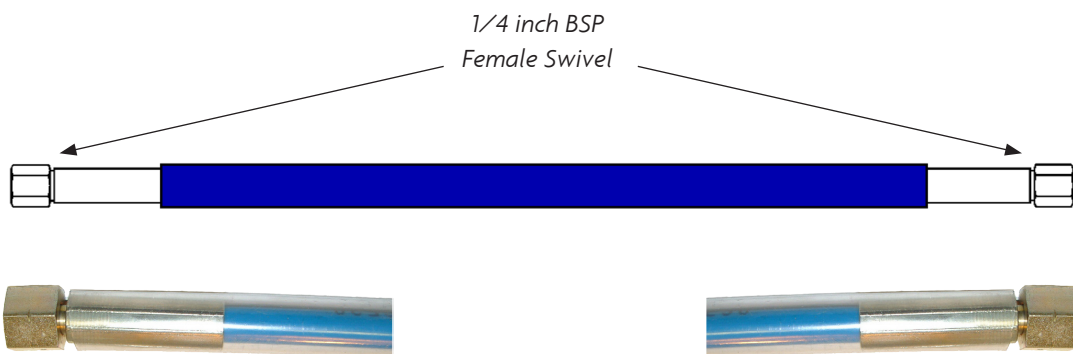

30m Downline Hose

CE Marked

Part No BT-1537-30

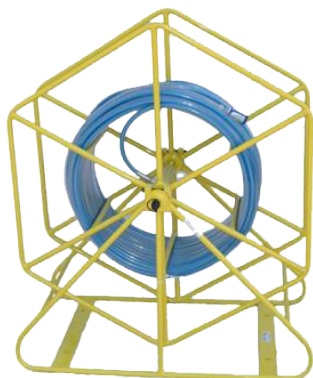

Hose Reel

Part No BT-1590

This hand operated hose reel and stand is made from tubular steel finished in yellow paint, epoxy marine powder coat.



BOLTIGHT[®]
HYDRAULIC BOLT TENSIONING

BOLTIGHT is the UK
Registered Trade Mark
of Boltight Limited