

## HYDRAULIC BOLT TENSIONING

### 1000 bar Flexible Hose Assemblies

These 1000 bar working pressure flexible hose assemblies have been designed for use with all Boltight 1000 bar equipment and are manufactured from multi spiral reinforced high pressure flexible hose, colour coded GREEN. They are delivered fully assembled with self sealing quick connect couplings (see DS-26) for fast and clean operation.

Hoses are assembled, filled with oil and pressure tested prior to despatch. Test certificates are available. All hoses are marked with serial

numbers for identification. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack.

Minimum burst pressure is 2600 bar and the minimum bend radius is 95 mm. Minimum hose length is 1m. Hoses are available in multiples of 0.1m length.

Special hose assemblies can be made to meet your needs. Please send details of your requirements for a fast response.



*BT-1040-N Hose*




*BT-1041-N Hose*



*BT-1042-N Hose*




*BT-1048-N Interconnecting Hose*

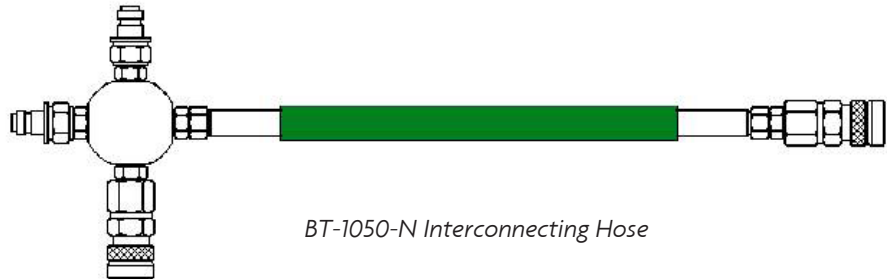

*BT-1050-N Interconnecting Hose*



*BT-1049-N Interconnecting Hose*

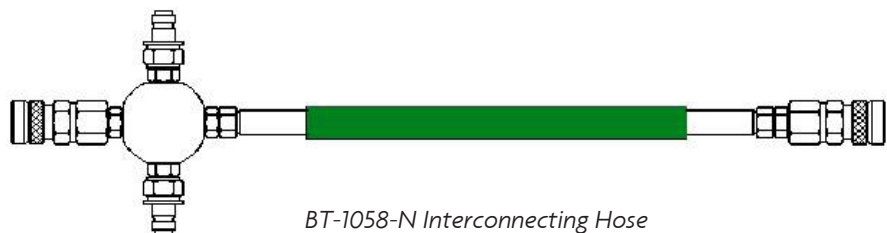

*BT-1058-N Interconnecting Hose*

N = Hose length in metres



**BOLTIGHT<sup>®</sup>**  
HYDRAULIC BOLT TENSIONING

BOLTIGHT is the UK  
Registered Trade Mark  
of Boltight Limited

FMA 001 B

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.

Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557

email: sales@boltight.com www.boltight.com