

HYDRAULIC BOLT TENSIONING

2500 bar Flexible Hose Assemblies

These 2500 bar working pressure hose assemblies are manufactured from multi spiral reinforced high pressure flexible hose, colour coded RED. They are delivered fully assembled with self sealing quick connect couplings and nipples for fast and clean operation. The quick connectors are fitted with RED plastic dust caps.

Hoses are assembled, filled with oil and pressure tested prior to despatch. Test certificates are available. All hoses are marked with serial numbers for identification. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack. Minimum

burst pressure is 6550 bar and the minimum bend radius is 200 mm. Minimum hose length is 1m. Hoses are available in multiples of 0.1m length.

These hoses conform to the requirements of the European Pressure Equipment Regulations and are CE Marked. The hoses are fitted with the very latest quick connectors rated at 2500 bar working pressure.

Special hose assemblies can be made to meet your needs. Please send details of your requirements for a fast response.



BT-2540-N Hose




BT-2541-N Hose



BT-2542-N Hose



BT-2548-N Interconnecting Hose

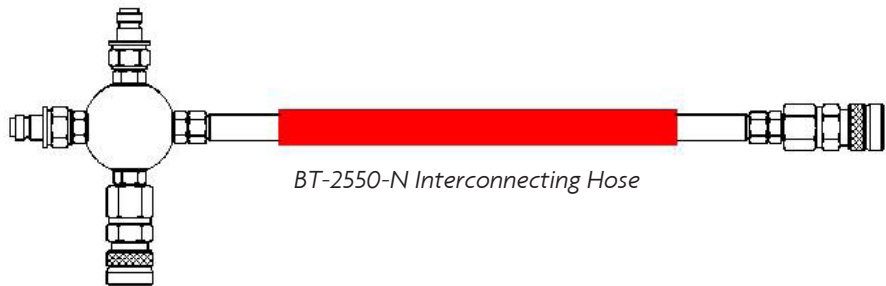

BT-2550-N Interconnecting Hose



BT-2549-N Interconnecting Hose



BT-2558-N Interconnecting Hose

N = Hose length in metres



BOLTIGHT[®]
HYDRAULIC BOLT TENSIONING

BOLTIGHT is the UK
Registered Trade Mark
of Boltight Limited